


COPPER STRIP WITH OR WITHOUT COVER

# FPX BUSBAR


Ø 9x4 to 12x3 mm if scissor cut / 20x6 mm if straight cut - 250 N/mm<sup>2</sup>  
 Ø .35x.15" to .47x.12" if scissor cut / .79x.24" if straight cut - 36 Ksi

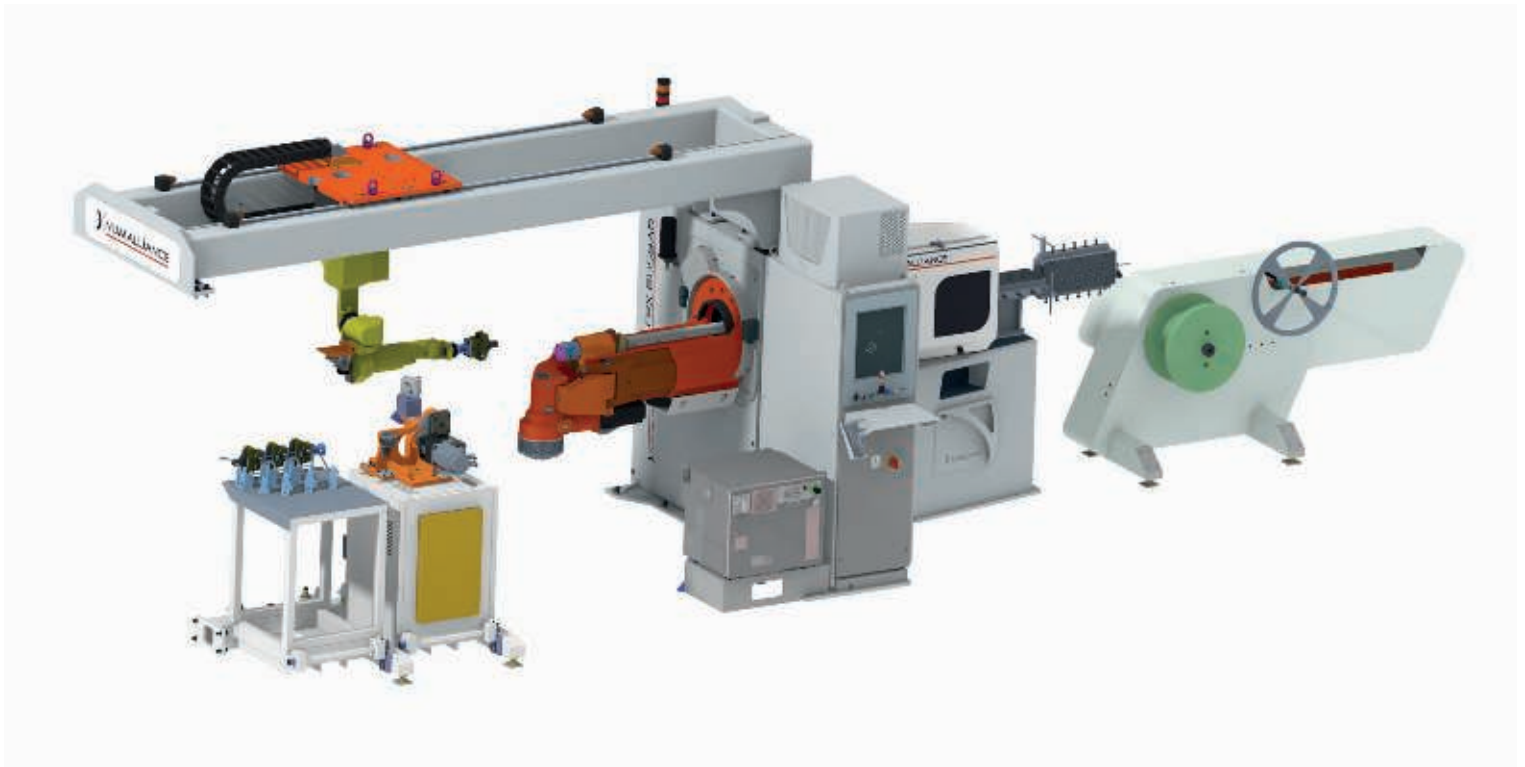

COPPER STRIP WITH OR WITHOUT COVER

# FPX BUSBAR

-   
Flattening
-   
Coining
-   
Notching
-   
Swaging
-   
Marking
-   
3D control
-   
Loading / Unloading
-   
Automation
-   
Laser stripping

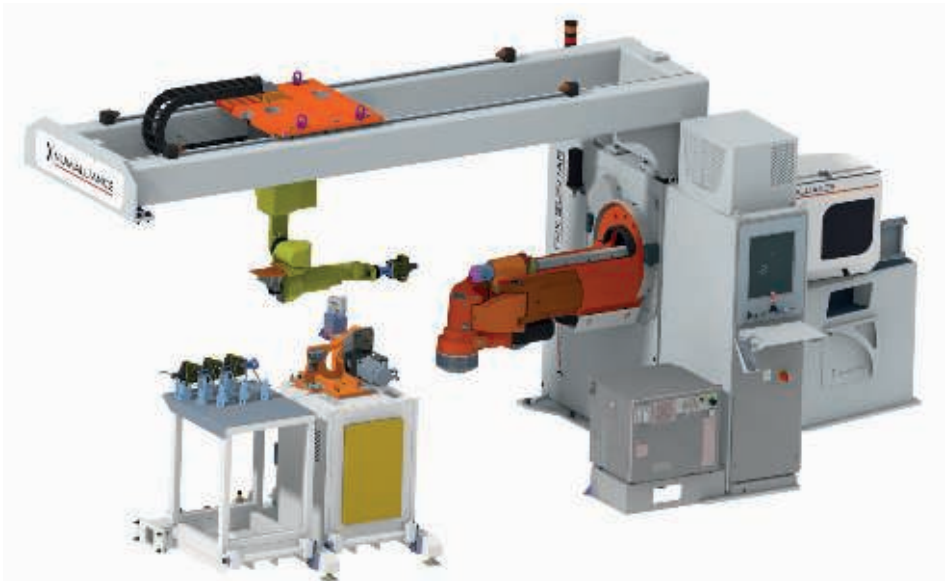

## MAIN FEATURES

- 3D bending from coil
- 1 bending head with multiple radii
- Simple and easy to configure tooling
- Cutting scissor cut (or straight cut optional)
- Single minute exchange bending tooling
- Different press operations can be integrated upstream
- Possibility to integrate 2 or more secondary operations
- Integrated safety gate system
- Laser stripping optional
- Belt feeder multisection with cover deformation

## CONTROL

- Industrial PC based software : Touch & Form
- Multilingual dialog and programming interface on a 19" touch screen
- Simulation program
- Additional I/O
- Internet connection : remote assistance and chat room
- Tool editor allows programming of complex parts with simple tooling

## DIMENSIONS

- Cell including 2 complementary units  
6265x2432x2521 mm without decoiler
- Cell including 2 complementary units  
246x95x99" without decoiler

## WEIGHT

- 6000 kg (with 2 complementary units)
- 13228 lbs (with 2 complementary units)

