


WIRE



STRAIGHTENING MACHINES  
**NUMACUT**

STRAIGHTENING AND CUTTING  
OF WIRE IN COIL FORM

Ø 1 to 12 mm  
Ø .04 to .47"

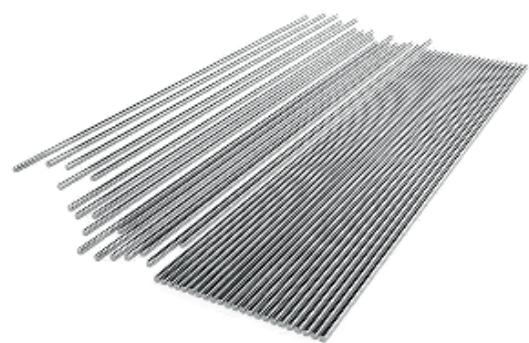

DESIGNER AND MANUFACTURER OF YOUR WIRE,  
TUBE AND FLAT-STOCK MACHINE

## STRAIGHTENING MACHINES

## NUMACUT



Chamfering

|  | NUMACUT W05                      | NUMACUT W08                      | NUMACUT W12                      |
|--|----------------------------------|----------------------------------|----------------------------------|
| Wire capacity up to 550 N/mm <sup>2</sup>  | From .04 to .20"<br>1 to 5 mm    | From .12 to .325"<br>3 to 8 mm   | From .20 to .47"<br>5 to 12 mm   |
| Shortest cutting length with fixed stop    | .26"<br>80 mm                    | .26"<br>80 mm                    | .26"<br>80 mm                    |
| Shortest cutting length without fixed stop | Wire $\phi$ x 1.5                | Wire $\phi$ x 1.5                | Wire $\phi$ x 1.5                |
| Power                                      | 25 kW                            | 25 kW                            | 25 kW                            |
| Machine footprint                          | 13.8x5.7x5"<br>4200x1750x1500 mm | 13.8x5.7x5"<br>4200x1750x1500 mm | 13.8x5.7x5"<br>4200x1750x1500 mm |
| Weight                                     | 4400 lbs<br>2000 kg              | 4400 lbs<br>2000 kg              | 4400 lbs<br>2000 kg              |



## MAIN FEATURES

- Machine with brushless motor
- Easy and fast programming thanks to touchscreen interface
- Spinning straightener
- Chamfering unit available as an option
- Control of batches production
- Cutting length tolerance  $\pm$  0.2 mm (.01")
- Decoiler (optional)

## CONTROL

- Touch&Form software
- Multilingual dialog and programming interface on a 12" touch screen
- Additional I/O (optional)
- Internet connection : remote assistance and chat room
- Industry 4.0

