


TUBE BENDING MACHINE

VB MEDIUM Ø

FLEXIBLE, MULTI STACK AND QUICK
TOOLING CHANGEOVER

Ø 6 to 51mm
Ø .24 to 2.0"

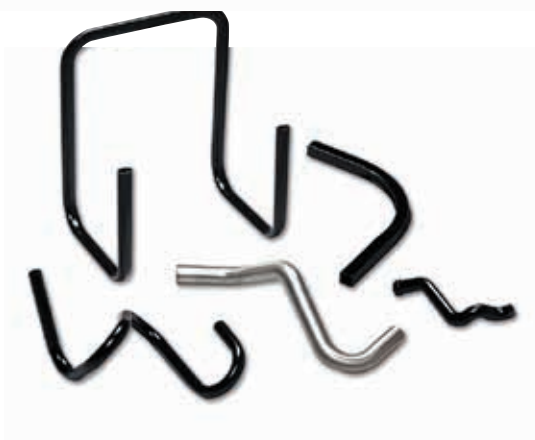

TUBE BENDING MACHINE

VB MEDIUM Ø



	VB 25 ELEC	VB 25 ELEC DR	VB 42 ELEC	VB 42 HTorque
Nominal tube OD	25.4x3 mm 1.0x0.1"	25.4x3 mm 1.0x0.1"	42x2 mm at 400N/mm ² 1.5x.08" at 58 KSI	50.8x2 mm at 400N/mm ² 2.0x.08" at 58 KSI
Tube length (std.)	1500 mm 59.0"	1500 mm 59.0"	3000 mm 117.0"	3000 mm 117.0"
Max bending radius	125 mm 5.0"	76.2 mm 3.0"	150 mm 6.0"	150 mm (6.0") 210 mm (8.25")
Bending tools	Single stack standard Multiple stack optional Left or right rotation	Multiple stack standard Left and right rotation	Single stack standard Multiple stack optional Left or right rotation	Single stack standard Multiple stack optional Left or right rotation



APPLICATIONS

- Air and Space
- Automotive
- HVAC
- Furniture
- Job Shop

MAIN FEATURES

- All electric benders
- Stackable multi-radii option
- Touch and Form control
- Industry standard compatible
- Low interference bending head
- Automatic Loading and Offloading (Option)

TOUCH & FORM
NUMALLIANCE



LIGHTSPEED

